




OUR PRODUCTS ARE DEDICATED
TO THE CONSERVATION OF
ENERGY

CLFe Series LED Canopy Light

The low profile design of the CLFe Series LED canopy light is ideally suited for security, covered entry ways, and soffit installation applications. The durable and robust design allows for universal recessed mount compatibilities. Delivering between 1,694 and 3,032 lumens while only consuming between 31 and 57 watts, its the ideal low power utility light.

Product Features:

- UV stabilized one piece polycarbonate lens
- Universal voltage (120vac to 277vac)
- Powder Coated Aluminum housing
- Robust design for superb durability.
- UL1598
- 3 year warranty

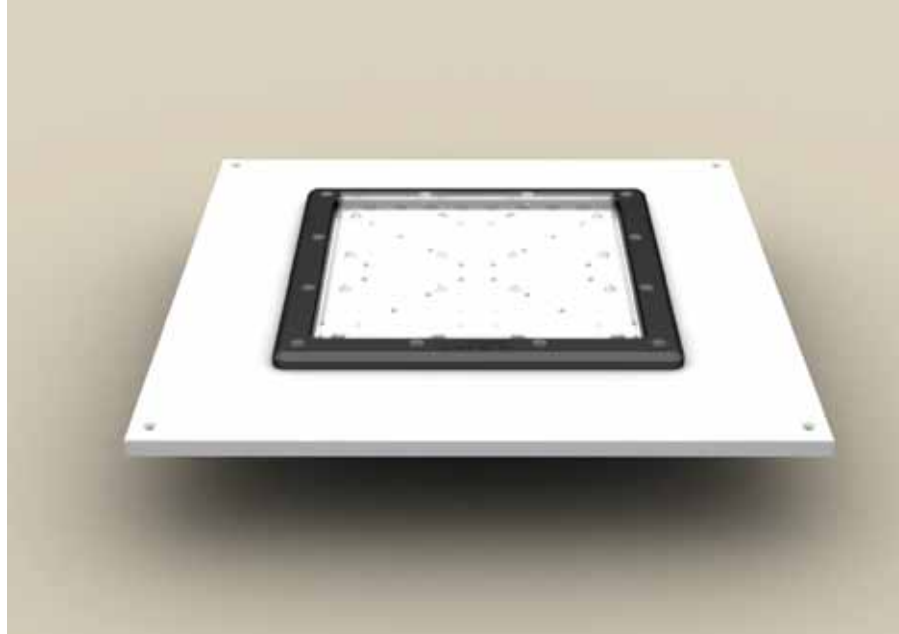

Model	System Power (Watts)	Initial Delivered Lumens	Lumens Per Watt	L70 (hrs) at 25c
CLFe Series LED drive current 700ma - Garage Low Bay				
CLFeX12	31	1694	55	70000
CLFeX24	57	3032	54	60000

X - "W" white housing (standard), "S" silver housing
"BR" bronze housing, "BLK" black housing

All models feature LEDs at 4500 K - 5000 K, CRI 75

